


太空 SPACE


高压压铸铝成型外壳。采用耐高温安全玻璃(钢化玻璃、陶瓷玻璃),有效的解决因剧烈温差导致玻璃爆裂问题。优异的散热设计保障光源工作寿命。精确的瞄准调节系统设计,在安装扶手两侧,底部均装有调节刻度盘,可方便调节水平,垂直方向的照射角度,在侧边可安装照射瞄准器,精确对准目标,调节照射方向。特别设计的呼吸器,用以解决高温下体内外压力平衡及灯内空气清洁,以保障防水性能。灯体设计采用了三种高纯度铝反射器,同时有6°、25°、40°光束角选择,超强光输出,可配光学透镜改变配光或镀膜玻璃改变光颜色。

采用双端金卤灯光源,效率高出传统投光灯30%,显色指数高达90。符合电视转播要求。内置挡眩光放射器,有效控制眩光。外置电器箱,安装方便。


Die cast aluminum housing.Safety glass (toughened glass, ceramic glass) effectively prevent glass failure caused by huge temperature difference.Excellent heat dissipation design guarantees the long service life of lamp.Protractors at both sides ensure optimum aiming of individual floodlights to achieve the desired lighting levels.Specifically designed vent equalizes pressure, and makes the luminaire impervious to dust and water. High purity anodized aluminum reflector,6 25 40 beams are available, pretty powerful light output, optical lens can be used to change light distribution, or color filter can be applied to change light color.Use double-ended metal halide lamp, 30% more efficient than traditional luminaire, with a CRI of 90, it can meet high demanding lighting and TV broadcasting requirements.Integral anti-glare device, effectively reduce glare.Remote control gearbox, easy installation.

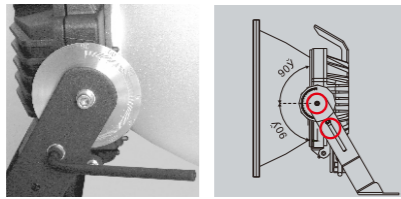


在安装扶手的侧面设有角度调节锁紧杆,便于精确的调节及锁定垂直照射角度
Protractors at both sides simplifies aiming and locking.

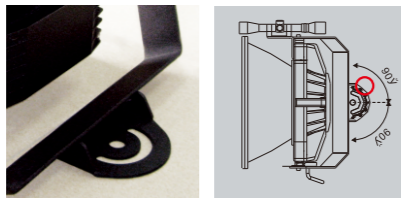


独有的底盘刻度调节设置,便于精确的调节水平照射角度
Mounting bracket with degree scale for horizontal aiming.

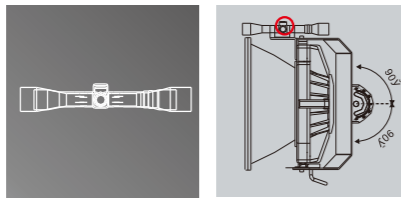


可加装独有的瞄准器设置,便于精确调节照射目标(另加装)
A telescope can be installed for precise aiming (on request).

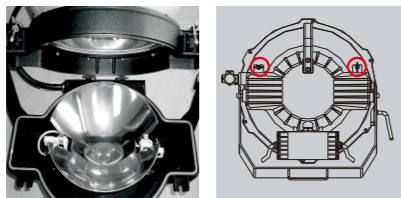


只需旋转两侧的蝴蝶螺丝即可打开后盖,非常便捷维护及更换光源(及保障防水性能)
Rear-access back cover can be easily opened for maintenance and relamping.

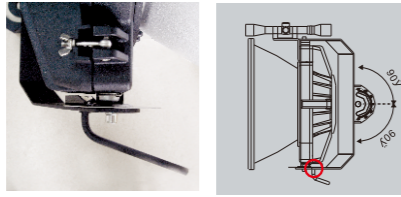

特殊设计的呼吸器,良好的解决内外压平衡的问题,保证良好的防水耐侯性
Specifically designed vent equalizes pressure, and makes the luminaire impervious to dust and water.

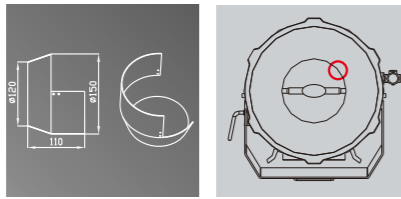

内置防眩光放射器,有效的控制眩光影响
Integral anti-glare device, effectively reduce glare.

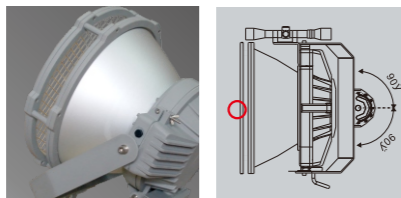


外挂装置,可装各种光学玻璃,滤色片和防撞护网。
Hanging device, for mounting optical lens, color filter and wire guard.




防护等级 IP Rating IP 65
输入电压 Input Voltage AC220V
显色性 Color rendering Ra>80
灯体颜色 Finish Color 皱纹银silver grey
灯体材质 Housing Material 压铸铝 Die cast aluminum
光源品牌 Lamp Brand OSRAM/PHILIPS/GE
重量 Weight 11.5KG

Code	Lamp	A	L	W1	W2	H	Ø
0114001.000	HIT-TS 1000W K12S-7	9.5	556	286	438	523	470
0114008.000	HIT-TS 2000W K12S-7	11.3	556	286	438	523	470




8101015.000
1000W
8101021.000
2000W




防护等级 IP Rating IP 65
输入电压 Input Voltage AC220V
显色性 Color rendering Ra>80
灯体颜色 Finish Color 皱纹银silver grey
灯体材质 Housing Material 压铸铝 Die cast aluminum
光源品牌 Lamp Brand OSRAM/PHILIPS/GE
重量 Weight 11.5KG

Code	Lamp	A	L	W1	W2	H	Ø
0114004.000	HIT-TS 1000W K12S-7	9.5	556	355	506	520	470
0114005.000	HIT-TS 2000W K12S-7	11.3	556	355	506	520	470




8101015.000
1000W
8101021.000
2000W




防护等级 IP Rating IP 65
输入电压 Input Voltage AC220V
显色性 Color rendering Ra>80
灯体颜色 Finish Color 皱纹银silver grey
灯体材质 Housing Material 压铸铝 Die cast aluminum
光源品牌 Lamp Brand OSRAM/PHILIPS/GE
重量 Weight 11.5KG

Code	Lamp	A	L	W1	W2	H	Ø
0114012.000	HIT-TS 1000W K12S-7	9.5	556	286	438	523	470
0114013.000	HIT-TS 2000W K12S-7	11.3	556	286	438	523	470



8101015.000
1000W
8101021.000
2000W




GEAR BOX 电器箱



8101015.000
1000W HID
220V/50Hz 18.3

8101021.000
2000W HID
380V/50Hz 20.3



安装孔位图 Mounting Dimension

