

WALL RECESSED LIGHT 嵌墙灯



莉拉	LEILA	222
艾琳	AILIE	224
维加 IV	VEGA IV	226
天使 II	ANGLE II	228
极光系列 III	AURORAIII	230



灯体采用高压压铸铝制件。

灯具表面保护层采用静电喷塑或阳极氧化处理工艺，使整灯耐腐蚀。

一体化散热结构，确保LED光源发光效率及使用寿命。

使用进口耐老化硅胶封圈，使灯具维持长期IP65防护等级。

灯具外露的连接线为硅橡胶线，耐阳光紫外线的长期侵害，保障灯具使用安全。

带预埋件，可梳理并保护埋于墙体里的线缆，方便施工安装及维护。

不对称光学反射系统，提高了地面的光照效率。

适用于：通道走廊、园林装饰照明等。

Die cast aluminum housing,stainless steel cover ring.

Electrostatic spraying body finish,corrosion resistance.

Imported sillicon gasket.

Silicon rubber connection wire.


With recessing box that can conceal & protect cable,easy for installation & maintenance.

in-built power supply.

Entire body waterproof.IP65.

Asymmetrical reflector ,ensure to get high illumination efficacy of ground.

Suitable for pathway,step and corridor lighting.



防护等级 IP Rating IP 65

输入电压 Input Voltage 100V-240VAC


显色性 Color rendering Ra>80

光源品牌 Lamp Brand CREE



环境温度 Operating Temperature -40°C~ +60°C

灯体材质 Housing material 压铸铝 (Die cast aluminum)

灯体颜色 Finish color 皱纹银(Wrinkles grey)



Code	Lamp	H1	H2	Ø1	Ø2
306501.003.0	MAX 3W 3000K/4000K/6000K	65	57	67	75



防护等级 IP Rating IP 65

输入电压 Input Voltage 100V-240VAC


显色性 Color rendering Ra>80

光源品牌 Lamp Brand CREE


环境温度 Operating Temperature -40°C~ +60°C

灯体材质 Housing material 压铸铝 (Die cast aluminum)

灯体颜色 Finish color 皱纹银(Wrinkles grey)



Code	Lamp	H1	H2	Ø1	Ø2
306503.003.0	MAX 3W 3000K/4000K/6000K	65	57	67	75






LED壁灯灯体采用精密铸铝或数控铝， 304不锈钢或铝合金面板。优质防水的连接
器，硅橡胶密封圈，强化玻璃，防水等级IP65。安装方便, 精度设计，防水防漏；
高效、环保、节能、低眩光。无辐射, 防止紫外线和红外线辐射对身体不会造成损
害。


LED wall light produced by precision cast aluminum or CNC aluminum lamp
body, polishing of 316 stainless steel panel or aluminum alloy cover, high-quality
waterproof connectors, silicone rubber sealing ring, strengthened
glass, waterproof, dustproof, anti leakage, corrosion resistance.
Small size ,low power consumption, long service life, strong and durable. Low power
consumption,
Long life, easy installation, elegant design, anti leakage, waterproof;
LED light source long life, no accident, almost no need to change the bulb, a
construction, for several years.
High efficiency, environmental protection, energy saving, no radiation, no glare, no
UV and infrared radiation on the body and the boy will not cause damage.




防护等级 IP Rating IP 65
输入电压 Input Voltage 100V-240VAC
显色性 Color rendering Ra>80
光源品牌 Lamp Brand CREE
环境温度 Operating Temperature -40°C~ +60°C
灯体材质 Housing material 不锈钢 (stainless steel)




Code	Lamp		H1	H2	Ø1	Ø2
306502.003.0	MAX 3W	3000K/4000K/6000K/RGB	65	57	67	77



防护等级 IP Rating IP 65
输入电压 Input Voltage 100V-240VAC
显色性 Color rendering Ra>80
光源品牌 Lamp Brand CREE
环境温度 Operating Temperature -40°C~ +60°C
灯体材质 Housing material 不锈钢 (stainless steel)




Code	Lamp		H1	H2	Ø	L
306504.003.0	MAX 3W	3000K/4000K/6000K/RGB	65	57	67	77






防护等级 IP Rating IP 65
输入电压 Input Voltage DC24V
显色性 Color rendering Ra>80
光源品牌 Lamp Brand OSRAM
环境温度 Operating Temperature -40°C~ +60°C
灯体材质 Housing material 不锈钢 (stainless steel)



Code	Lamp	L	W	H
306505.003.0	MAX 3W 3000K/4000K/6000K/RGB	66	70	40



LED壁灯灯体采用精密铸铝或数控铝， 304不锈钢或铝合金面板。优质防水的连接
器，硅橡胶密封圈，强化玻璃，防水等级IP65。安装方便, 精度设计，防水防漏；
高效、环保、节能、低眩光。无辐射, 防止紫外线和红外线辐射对身体不会造成损
害。

LED wall light produced by precision cast aluminum or CNC aluminum lamp
body, polishing of 316 stainless steel panel or aluminum alloy cover, high-quality
waterproof connectors, silicone rubber sealing ring, strengthened
glass, waterproof, dustproof, anti leakage, corrosion resistance.
Small size ,low power consumption, long service life, strong and durable. Low power
consumption,
Long life, easy installation, elegant design, anti leakage, waterproof;
LED light source long life, no accident, almost no need to change the bulb, a
construction, for several years.
High efficiency, environmental protection, energy saving, no radiation, no glare, no
UV and infrared radiation on the body and the boy will not cause damage.





灯体采用高压压铸铝制件，304 不锈钢面盖。
灯具表面保护层采用静电喷塑处理工艺，使整灯耐腐蚀。
一体化散热结构，确保LED光源发光效率及使用寿命。
使用进口耐老化硅胶密封圈，使灯具维持长期IP65防护等级。。
灯具外露的连接线为硅橡胶线，保障灯具使用安全。
带预埋件，可梳理并保护埋于墙体里的线缆，方便施工安装及维护。
不对称光学反射系统，提高了地面的光照效率。
适用于：通道走廊、园林装饰照明等。


Die cast aluminum housing, stainless steel cover ring.
Electrostatic spraying body finish, corrosion resistance.
Imported silicon gasket.
Silicon rubber connection wire.
With recessing box that can conceal & protect cable, easy for installation & maintenance.
in-built power supply.
Entire body waterproof. IP65.
Asymmetrical reflector, ensure to get high illumination efficacy of ground.
Suitable for pathway, step and corridor lighting.




防护等级 IP Rating IP 65
输入电压 Input Voltage AC220V/DC24V
显色性 Color rendering Ra>80
光源品牌 Lamp Brand CREE
环境温度 Operating Temperature -40°C~ +60°C
透光罩 Diffuser 钢化磨砂玻璃 (Tempered Glass)
灯体材质 Housing material 不锈钢 (stainless steel)
重量 Weight 0.8kg

Code	Lamp				L	W	H
206001.003	MAX 3W	3000K/4000K/6000K	AC220V	120°	215	65	62
206006.002	MAX 2W	3000K/4000K/6000K	DC24V	120°	215	65	62

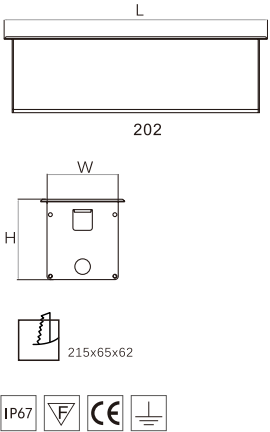

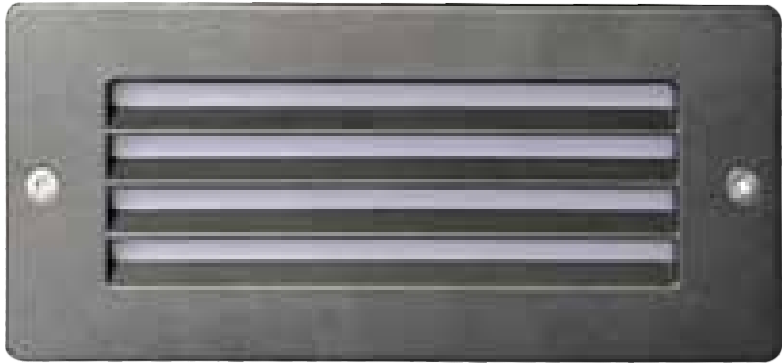

防护等级 IP Rating IP 65
输入电压 Input Voltage AC220V
显色性 Color rendering Ra>80
光源品牌 Lamp Brand CREE
环境温度 Operating Temperature -40°C~ +60°C
透光罩 Diffuser 钢化磨砂玻璃 (Tempered Glass)
灯体材质 Housing material 不锈钢 (stainless steel)
重量 Weight 0.8kg



单色不带控制 Sngle color			L	W	H
208001.008.0	8W	3000K/4000K/6000K	195	80	77



灯体采用高压压铸铝制件，304 不锈钢面盖。
灯具表面保护层采用静电喷塑处理工艺，使整灯耐腐蚀。
一体化散热结构，确保LED光源发光效率及使用寿命。
使用进口耐老化硅胶密封圈，使灯具维持长期IP65防护等级。。
灯具外露的连接线为硅橡胶线，保障灯具使用安全。
带预埋件，可梳理并保护埋于墙体里的线缆，方便施工安装及维护。
不对称光学反射系统，提高了地面的光照效率。
适用于：通道走廊、园林装饰照明等。

Die cast aluminum housing, stainless steel cover ring.
Electrostatic spraying body finish, corrosion resistance.
Imported silicon gasket.
Silicon rubber connection wire.
With recessing box that can conceal & protect cable, easy for installation & maintenance.
in-built power supply.
Entire body waterproof. IP65.
Asymmetrical reflector, ensure to get high illumination efficacy of ground.
Suitable for pathway, step and corridor lighting.

